

graph twoway qfit — Twoway quadratic prediction plots

[Syntax](#) [Menu](#) [Description](#) [Options](#)
[Remarks and examples](#) [Also see](#)

Syntax

```
twoway qfit yvar xvar [if] [in] [weight] [, options]
```

<i>options</i>	Description
<code>range(# #)</code>	range over which predictions calculated
<code>n(#)</code>	number of prediction points
<code>atobs</code>	calculate predictions at <i>xvar</i>
<code>estopts(<i>regress_options</i>)</code>	options for <code>regress</code>
<code>predopts(<i>predict_options</i>)</code>	options for <code>predict</code>
<i>cline_options</i>	change look of predicted line
<i>axis_choice_options</i>	associate plot with alternative axis
<i>twoway_options</i>	titles, legends, axes, added lines and text, by, regions, name, aspect ratio, etc.

See [G-3] *cline_options*, [G-3] *axis_choice_options*, and [G-3] *twoway_options*.

All options are *rightmost*; see [G-4] **concept: repeated options**.

yvar and *xvar* may contain time-series operators; see [U] **11.4.4 Time-series varlists**.

`aweight`s, `fweight`s, and `pweight`s are allowed. Weights, if specified, affect estimation but not how the weighted results are plotted. See [U] **11.1.6 weight**.

Menu

Graphics > Twoway graph (scatter, line, etc.)

Description

`twoway qfit` calculates the prediction for *yvar* from a linear regression of *yvar* on *xvar* and $xvar^2$ and plots the resulting curve.

Options

`range(# #)` specifies the *x* range over which predictions are calculated. The default is `range(. .)`, meaning the minimum and maximum values of *xvar*. `range(0 10)` would make the range 0 to 10, `range(. 10)` would make the range the minimum to 10, and `range(0 .)` would make the range 0 to the maximum.

`n(#)` specifies the number of points at which predictions over `range()` are to be calculated. The default is `n(100)`.

`atobs` is an alternative to `n()`. It specifies that the predictions be calculated at the `xvar` values. `atobs` is the default if `predopts()` is specified and any statistic other than `xb` is requested.

`estopts(regress_options)` specifies options to be passed along to `regress` to estimate the linear regression from which the curve will be predicted; see [R] [regress](#). If this option is specified, commonly specified is `estopts(nocons)`.

`predopts(predict_options)` specifies options to be passed along to `predict` to obtain the predictions after estimation by `regress`; see [R] [regress postestimation](#).

`cline_options` specify how the prediction line is rendered; see [G-3] [cline_options](#).

`axis_choice_options` associate the plot with a particular y or x axis on the graph; see [G-3] [axis_choice_options](#).

`twoway_options` are a set of common options supported by all `twoway` graphs. These options allow you to title graphs, name graphs, control axes and legends, add lines and text, set aspect ratios, create graphs over `by()` groups, and change some advanced settings. See [G-3] [twoway_options](#).

Remarks and examples

[stata.com](http://www.stata.com)

Remarks are presented under the following headings:

Typical use


Cautions

Use with `by()`

Typical use

`twoway qfit` is nearly always used in conjunction with other `twoway` plottypes, such as

```
. use http://www.stata-press.com/data/r13/auto
(1978 Automobile Data)
. scatter mpg weight || qfit mpg weight
```

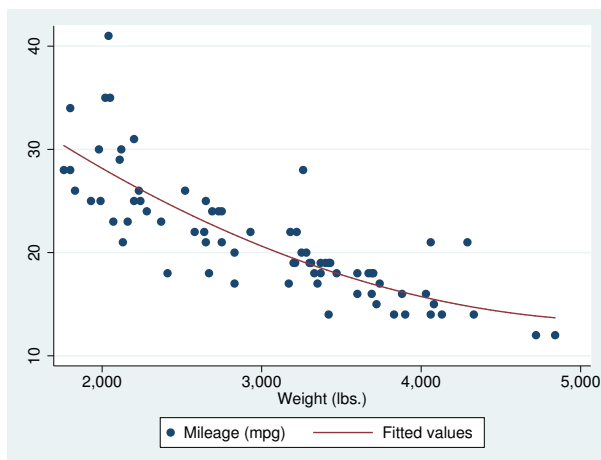

Results are visually the same as typing

```
. generate tempvar = weight^2
. regress mpg weight tempvar
. predict fitted
. scatter mpg weight || line fitted weight
```

Cautions

Do not use `twoway qfit` when specifying the `axis_scale_options` `yscale(log)` or `xscale(log)` to create log scales. Typing


```
. scatter mpg weight, xscale(log) || qfit mpg weight
```

produces something that is not a parabola because the regression estimated for the prediction was for mpg on weight and weight^2 , not mpg on $\log(\text{weight})$ and $\log(\text{weight})^2$.

Use with by()

`qfit` may be used with `by()` (as can all the twoway plot commands):

```
. scatter mpg weight || qfit mpg weight ||, by(foreign, total row(1))
```

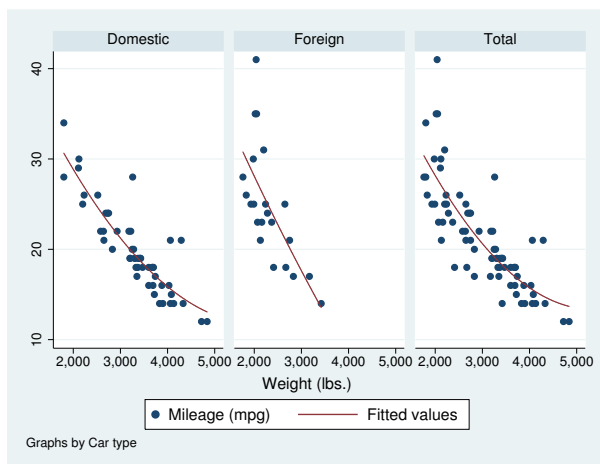

Also see

[G-2] [graph twoway line](#) — Twoway line plots

[G-2] [graph twoway lfit](#) — Twoway linear prediction plots

[G-2] [graph twoway fpfit](#) — Twoway fractional-polynomial prediction plots

[G-2] [graph twoway mband](#) — Twoway median-band plots

[G-2] [graph twoway mspline](#) — Twoway median-spline plots

[G-2] [graph twoway qfitci](#) — Twoway quadratic prediction plots with CIs

[R] [regress](#) — Linear regression