

grmeanby — Graph means and medians by categorical variables

[Description](#)
[Options](#)

[Quick start](#)
[Remarks and examples](#)

[Menu](#)
[References](#)

[Syntax](#)

Description

`grmeanby` graphs the (optionally weighted) means or medians of *varname* according to the values of the variables in *varlist*. The variables in *varlist* may be string or numeric and, if numeric, may be labeled.

Quick start

Graph means of *v1* for each level of categorical variables *cvar1*, *cvar2*, and *cvar3*

```
grmeanby cvar1 cvar2 cvar3, sum(v1)
```

As above, but graph medians

```
grmeanby cvar1 cvar2 cvar3, sum(v1) median
```

As above, but use + as the marker

```
grmeanby cvar1 cvar2 cvar3, sum(v1) median msymbol(+)
```

Menu

Statistics > Summaries, tables, and tests > Summary and descriptive statistics > Graph means/medians by groups

Syntax

```
grmeanby varlist [if] [in] [weight] , summarize(varname) [, options]
```

<i>options</i>	Description
Main	
* <u>summarize</u> (<i>varname</i>)	graph mean (or median) of <i>varname</i>
<u>median</u>	graph medians; default is to graph means
Plot	
<i>cline_options</i>	change look of the lines
<i>marker_options</i>	change look of markers (color, size, etc.)
<i>marker_label_options</i>	add marker labels; change look or position
Y axis, X axis, Titles, Legend, Overall	
<i>twoway_options</i>	any options other than by() documented in [G-3] <i>twoway_options</i>

*summarize(*varname*) is required.

*aweight*s and *fweight*s are allowed; see [U] 11.1.6 **weight**.

Options

Main

summarize(*varname*) is required; it specifies the name of the variable whose mean or median is to be graphed.

median specifies that the graph is to be of medians, not means.

Plot

cline_options affect the rendition of the lines through the markers, including their color, pattern, and width; see [G-3] *cline_options*.

marker_options affect the rendition of markers drawn at the plotted points, including their shape, size, color, and outline; see [G-3] *marker_options*.

marker_label_options specify if and how the markers are to be labeled; see [G-3] *marker_label_options*.

Y axis, X axis, Titles, Legend, Overall

twoway_options are any of the options documented in [G-3] *twoway_options*, excluding by(). These include options for titling the graph (see [G-3] *title_options*) and for saving the graph to disk (see [G-3] *saving_option*).

Remarks and examples


[stata.com](http://www.stata.com)

The idea of graphing means of categorical variables was shown in Chambers and Hastie (1992, 3). Because this was shown in the context of an S function for making such graphs, it doubtless has roots going back further than that. `grmeanby` is, in any case, another implementation of what we will assume is their idea.

► Example 1

Using a variation of our auto dataset, we graph the mean of mpg by foreign, rep77, rep78, and make:

```
. use http://www.stata-press.com/data/r14/auto1
(Automobile Models)
. grmeanby foreign rep77 rep78 make, sum(mpg)
```

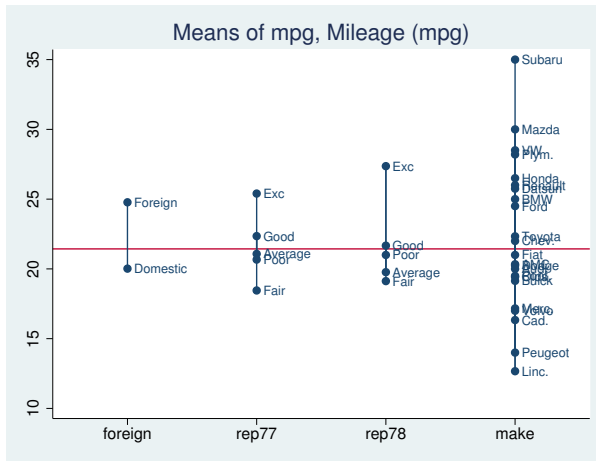

If we had wanted a graph of medians rather than means, we could have typed

```
. grmeanby foreign rep77 rep78 make, sum(mpg) median
```

◀

References

- Chambers, J. M., and T. J. Hastie, ed. 1992. *Statistical Models in S*. Pacific Grove, CA: Wadsworth and Brooks/Cole.
- Cox, N. J. 2014. Speaking Stata: Design plots for graphical summary of a response given factors. *Stata Journal* 14: 975–990.
- Gould, W. W. 1993. gr12: Graphs of means and medians by categorical variables. *Stata Technical Bulletin* 12: 13. Reprinted in *Stata Technical Bulletin Reprints*, vol. 2, pp. 44–45. College Station, TX: Stata Press.