

**graph twoway contourline** — Twoway contour-line plot[Description](#)  
[Options](#)[Quick start](#)  
[Remarks and examples](#)[Menu](#)  
[Also see](#)[Syntax](#)

## Description

`twoway contourline` displays  $z$  as contour lines in  $(y,x)$ .

## Quick start

Contour-line plot displaying the value of  $z$  for each  $(x,y)$  pair

```
twoway contourline z y x
```

As above, but draw contour lines for  $z = -4$  to 1.5 in increments of 0.25

```
twoway contourline z y x, ccuts(-4(.25)1.5)
```

Specify 25 contour levels

```
twoway contourline z y x, levels(25)
```

As above, but with colored contour lines

```
twoway contourline z y x, levels(25) colorlines
```

As above, but with an alternative method of selecting line colors

```
twoway contourline z y x, levels(25) colorlines crule(chue)
```

Reverse the order cutpoints are listed in the legend

```
twoway contourline z y x, levels(25) colorlines reversekey
```

Add “My Title” as the title of the graph

```
twoway contourline z y x, title("My Title")
```

Add “My note” as a note on the graph

```
twoway contourline z y x, title("My Title") note("My note")
```

## Menu

Graphics > Twoway graph (scatter, line, etc.)

## Syntax

```
twoway contourline z y x [if] [in] [, options]
```

<i>options</i>	Description
<u>ccuts</u> ( <i>numlist</i> )	list of values for contour lines or cuts
<u>levels</u> (#)	number of contour levels
<u>minmax</u>	include contour lines for minimum and maximum of <i>z</i>
<u>format</u> (% <i>fmt</i> )	display format for <u>ccuts</u> () or <u>levels</u> ()
<u>colorlines</u>	display contour lines in different colors
<u>crule</u> ( <i>crule</i> )	rule for creating contour-line colors
<u>scolor</u> ( <i>colorstyle</i> )	starting color for contour rule
<u>ecolor</u> ( <i>colorstyle</i> )	ending color for contour rule
<u>ccolors</u> ( <i>colorstylelist</i> )	list of colors for contour lines
<u>clwidths</u> ( <i>linewidthstylelist</i> )	list of widths for contour lines
<u>reversekey</u>	reverse the order of the keys in <a href="#">contour-line legend</a>
<u>interp</u> ( <i>interpmethod</i> )	interpolation method if ( <i>z</i> , <i>y</i> , <i>x</i> ) does not fill a regular grid
<i>twoway_options</i>	titles, legends, axes, added lines and text, by, regions, name, aspect ratio, etc.

<i>crule</i>	Description
<u>hue</u>	use equally spaced <a href="#">hues</a> between <u>scolor</u> () and <u>ecolor</u> (); the default
<u>chue</u>	use equally spaced <a href="#">hues</a> between <u>scolor</u> () and <u>ecolor</u> (); unlike <u>hue</u> , it uses $360 + \text{hue}$ of the <u>ecolor</u> () if the hue of the <u>ecolor</u> () is less than the hue of the <u>scolor</u> ()
<u>intensity</u>	use equally spaced <a href="#">intensities</a> with <u>ecolor</u> () as the base; <u>scolor</u> () is ignored
<u>linear</u>	use equally spaced interpolations of the <a href="#">RGB</a> values between <u>scolor</u> () and <u>ecolor</u> ()

<i>interpmethod</i>	Description
<u>thinplatespline</u>	thin-plate-spline interpolation; the default
<u>shepard</u>	Shepard interpolation
<u>none</u>	no interpolation; plot data as is

## Options

ccuts(), levels(), minmax, and format() determine how many contours are created and the values of those contours.

ccuts(*numlist*) specifies the *z* values for the contour lines. Contour lines are drawn at each value of *numlist*.

levels(#) specifies the number of contour lines to create; # - 1 contour lines will be created.

`minmax` is a modifier of `levels()` and specifies that contour lines be drawn for the minimum and maximum values of  $z$ . By default, lines are drawn only for the cut values implied by `levels`, not the full range of  $z$ .

`format(%fmt)` specifies the display format used to create the labels in the [contour legend](#) for the contour lines.

`ccuts()` and `levels()` are different ways of specifying the contour cuts and may not be combined.

`colorlines`, `crule()`, `scolor()`, `ecolor()`, `ccolors()`, and `clwidths()` determine the colors and width that are used for each contour line.

`colorlines` specifies that the contour lines be drawn in different colors. Unless the `ccolors()` option is specified, the colors are determined by `crule()`.

`crule(crule)` specifies the rule used to set the colors for the contour lines. Valid *crules* are `hue`, `chue`, `intensity`, and `linear`. The default is `crule(hue)`.

`scolor(colorstyle)` specifies the starting color for the rule. See [\[G-4\] colorstyle](#).

`ecolor(colorstyle)` specifies the ending color for the rule. See [\[G-4\] colorstyle](#).

`ccolors(colorstylelist)` specifies a list of *colorstyles* for each contour line. If RGB, CMYK, HSV, or intensity-adjusted (for example, `red*.3`) *colorstyle* is specified, they should be placed in quotes. Examples of valid `ccolors()` options include `ccolors(red green magenta)` and `ccolors(red "55 132 22" ".3 .9 .3 hsv" blue)`. See [\[G-4\] colorstyle](#).

`clwidths(linewidthstylelist)` specifies a list of *linewidthstyles*, one for each contour line. See [\[G-4\] linewidthstyle](#).

`reversekey` specifies that the order of the keys in the contour-line legend be reversed. By default, the keys are ordered from top to bottom, starting with the key for the highest values of  $z$ . See `plegend_option` in [\[G-3\] legend\\_options](#).

`interp(interpmethod)` specifies the interpolation method to use if  $z$ ,  $y$ , and  $x$  do not fill a regular grid. Variables  $z$ ,  $y$ , and  $x$  fill a regular grid if for every combination of nonmissing  $(y,x)$ , there is at least one nonmissing  $z$  corresponding to the pair in the dataset. For example, the following dataset forms a  $2 \times 2$  grid.

```
. input z y x
      z y x
1.   1 1 1
2.   2 4 1
3.   3 4 1
4.   1 1 2
5.   1 4 2
6.   end
```

If there is more than one  $z$  value corresponding to a pair of  $(y,x)$ , the smallest  $z$  value is used in plotting. In the above example, there are two  $z$  values corresponding to pair  $(4,1)$ , and the smallest value, 2, is used.

```
. input z y x
      z y x
1.   1 1 1
2.   2 2 1
3.   1 1 2
4.   end
```

does not fill a regular grid because there is no  $z$  value corresponding to the pair  $(2,2)$ .

*twoway\_options* are any of the options documented in [G-3] *twoway\_options*. These include options for titling the graph (see [G-3] *title\_options*); for saving the graph to disk (see [G-3] *saving\_option*); for controlling the labeling and look of the axes (see [G-3] *axis\_options*); for controlling the look, contents, position, and organization of the legend (see [G-3] *legend\_options*); for adding lines (see [G-3] *added\_line\_options*) and text (see [G-3] *added\_text\_options*); and for controlling other aspects of the graph's appearance (see [G-3] *twoway\_options*).

## Remarks and examples

[stata.com](http://www.stata.com)


Remarks are presented under the following headings:

*Controlling the number of contour lines and their values*  
*Controlling the colors of the contour lines*  
*Choose the interpolation method*

### Controlling the number of contour lines and their values


We could draw a contour-line plot with default values by typing

```
. use https://www.stata-press.com/data/r17/sandstone
(Subsea elevation of Lamont sandstone in an area of Ohio)
. twoway contourline depth northing easting
```

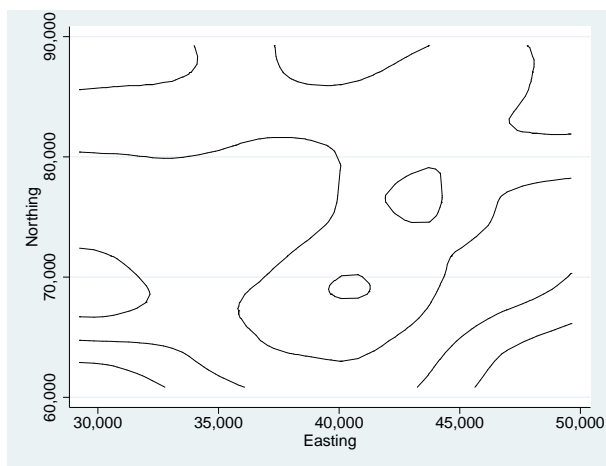


We add the `colorlines` option to display the values of cuts in the contour legend. We also include the `levels()` option to create  $\# - 1$  contour lines equally spaced between `min(depth)` and `max(depth)`.

```
. twoway contourline depth northing easting, colorlines levels(10)
```

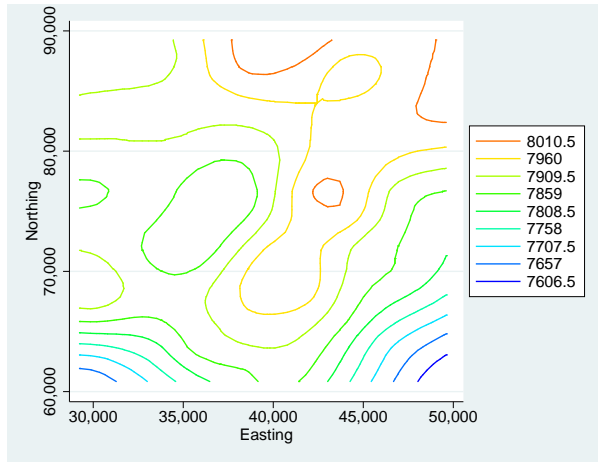

The `ccuts()` option gives you the finest control over creating contour lines. Here we use it to draw a contour-line plot with six cuts at 7500, 7600, 7700, 7800, 7900, and 8000.

```
. twoway contourline depth northing easting, colorlines ccuts(7500(100)8000)
```

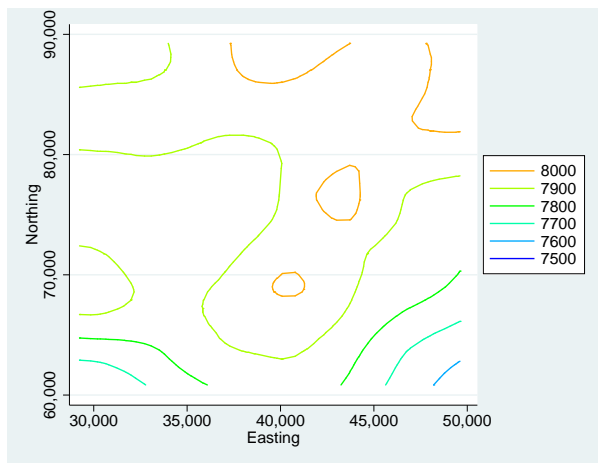

## Controlling the colors of the contour lines

`crule()`, `scolor()`, and `ecolor()` control the colors for each contour line.

```
. twoway contourline depth northing easting, level(10) format(%9.1f)
> colorlines scolor(green) ecolor(red)
```

draws a contour-line plot with lines of nine equally spaced  $z$  values between `min(depth)` and `max(depth)`. The starting color for lines is green and the ending color for lines is red. Also, the legend labels' display format is `%9.1f`.

`ccolors()` specifies a list of colors to be used for each contour line.

```
. twoway contourline depth northing easting, ccuts(7600(100)8000)
> colorlines ccolors(red green magenta blue yellow)
```

### Choose the interpolation method

See *Choose the interpolation method* in [G-2] [graph twoway contour](#).

### Also see

[G-2] [graph twoway contour](#) — Twoway contour plot with area shading

[G-2] [graph twoway line](#) — Twoway line plots

[G-2] [graph twoway connected](#) — Twoway connected plots