

graph twoway mband — Twoway median-band plots[Description](#)
[Options](#)[Quick start](#)
[Remarks and examples](#)[Menu](#)
[Also see](#)[Syntax](#)

Description

`twoway mband` calculates cross medians and then graphs the cross medians as a line plot.

Quick start

Median-band plot of y versus x

```
twoway mband y x
```

Overlaid on a scatterplot of the observed data

```
twoway scatter y x || mband y x
```

As above, but reduce the scatterplot markers to half their normal size

```
twoway scatter y x, msize(*.5) || mband y x
```

As above, but specify 20 bands

```
twoway scatter y x, msize(*.5) || mband y x, bands(20)
```

Add the title “My Title”

```
twoway scatter y x || mband y x, title("My Title")
```

As above, but suppress the legend

```
twoway scatter y x || mband y x, title("My Title") legend(off)
```

Menu

Graphics > Twoway graph (scatter, line, etc.)

Syntax

```
twoway mband yvar xvar [if] [in] [, options]
```

<i>options</i>	Description
<code>bands(#)</code>	number of bands
<i>cline_options</i>	change look of the line
<i>axis_choice_options</i>	associate plot with alternative axis
<i>twoway_options</i>	titles, legends, axes, added lines and text, by, regions, name, aspect ratio, etc.

All options are *rightmost*; see [G-4] **Concept: repeated options**.

Options

`bands(#)` specifies the number of bands on which the calculation is to be based. The default is $\max(10, \text{round}(10 \times \log_{10}(N)))$, where N is the number of observations.

In a median-band plot, the x axis is divided into $\#$ equal-width intervals and then the median of y and the median of x are calculated in each interval. It is these cross medians that `mband` graphs as a line plot.

cline_options specify how the median-band line is rendered and its appearance; see [G-3] [cline_options](#).

axis_choice_options associate the plot with a particular y or x axis on the graph; see [G-3] [axis_choice_options](#).

twoway_options are a set of common options supported by all `twoway` graphs. These options allow you to title graphs, name graphs, control axes and legends, add lines and text, set aspect ratios, create graphs over `by()` groups, and change some advanced settings. See [G-3] [twoway_options](#).

Remarks and examples

[stata.com](http://www.stata.com)

Remarks are presented under the following headings:


Typical use

Use with by()

Typical use

Median bands provide a convenient but crude way to show the tendency in the relationship between y and x :

```
. use https://www.stata-press.com/data/r17/auto
(1978 automobile data)
. scatter mpg weight, msize(*.5) || mband mpg weight
```

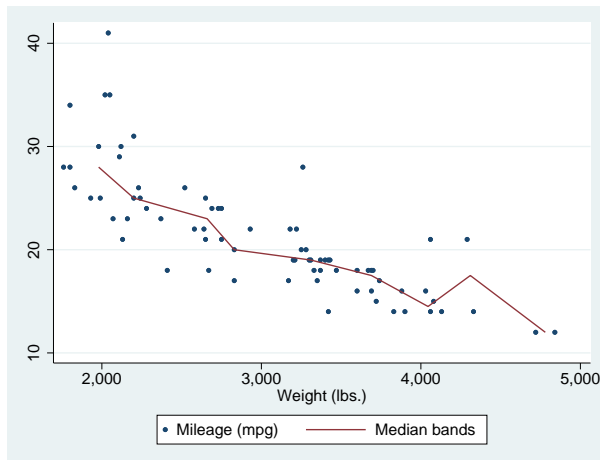


The important part of the above is “mband mpg weight”. On the *scatter*, we specified `msize(*.5)` to make the marker symbols half their normal size; see [\[G-4\] size](#).

Use with by()

`mband` may be used with `by()` (as can all the *twoway* plot commands):

```
. scatter mpg weight, ms(oh) ||
  mband mpg weight ||, by(foreign, total row(1))
```

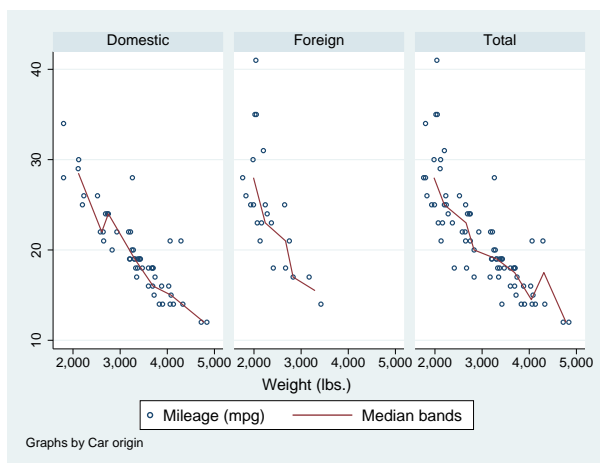

In the above graph, we specified `ms(oh)` so as to use hollow symbols; see [\[G-4\] symbolstyle](#).

Also see

[G-2] **graph twoway fplit** — Twoway fractional-polynomial prediction plots

[G-2] **graph twoway lfit** — Twoway linear prediction plots

[G-2] **graph twoway line** — Twoway line plots

[G-2] **graph twoway mspline** — Twoway median-spline plots

[G-2] **graph twoway qfit** — Twoway quadratic prediction plots