

## Description

Mata is a C-like compiled-into-pseudocode language with matrix extensions and runtime linking.

## Syntax

The basic language syntax is

*istmt*

where

<i>istmt</i> :=	<i>stmt</i> <i>function name</i> ( <i>farglist</i> ) <i>fstmt</i> <i>ftype name</i> ( <i>farglist</i> ) <i>fstmt</i> <i>ftype function name</i> ( <i>farglist</i> ) <i>fstmt</i>	
<i>stmt</i> :=	<i>nothing</i> ; <i>version number</i> { <i>stmt</i> ... } <i>exp</i> <i>pragma pstmt</i> if ( <i>exp</i> ) <i>stmt</i> if ( <i>exp</i> ) <i>stmt</i> else <i>stmt</i> for ( <i>exp</i> ; <i>exp</i> ; <i>exp</i> ) <i>stmt</i> while ( <i>exp</i> ) <i>stmt</i> do <i>stmt</i> while ( <i>exp</i> ) break continue <i>label</i> : goto <i>label</i> return return( <i>exp</i> )	(meaning <i>nothing</i> )
<i>fstmt</i> :=	<i>stmt</i> <i>type arglist</i> external <i>type arglist</i>	
<i>arglist</i> :=	<i>name</i> <i>name</i> () <i>name</i> , <i>arglist</i> <i>name</i> () , <i>arglist</i>	
<i>farglist</i> :=	<i>nothing</i> <i>efarglist</i>	

---

*efarglist* := *felement*  
*felement, efarglist*  
| *felement*  
| *felement, efarglist*

*felement* := *name*  
*type name*  
*name()*  
*type name()*

*ftype* := *type*  
*void*

*type* := *eltype*  
*orgtype*  
*eltype orgtype*

*eltype* := *transmorphic*  
*string*  
*numeric*  
*real*  
*complex*  
*pointer*  
*pointer(ptrtype)*

*orgtype* := *matrix*  
*vector*  
*rowvector*  
*colvector*  
*scalar*

*ptrtype* := *nothing*  
*type*  
*type function*  
*function*

*pstmt* := *unset name*  
*unused name*

*name* := identifier up to 32 characters long

*label* := identifier up to 8 characters long

*exp* := expression as defined in [M-2] **exp**

# Remarks and examples

Remarks are presented under the following headings:

- Treatment of semicolons*
- Types and declarations*
- Void matrices*
- Void functions*
- Operators*
- Subscripts*
- Implied input tokens*
- Function argument-passing convention*
- Passing functions to functions*
- Optional arguments*

After reading [M-2] **Syntax**, see [M-2] **Intro** for a list of entries that give more explanation of what is discussed here.

## Treatment of semicolons

Semicolon (;) is treated as a line separator. It is not required, but it may be used to place two statements on the same physical line:

```
x = 1 ; y = 2 ;
```

The last semicolon in the above example is unnecessary but allowed.

Single statements may continue onto more than one line if the continuation is obvious. Take “obvious” to mean that there is a hanging open parenthesis or a hanging dyadic operator; for example,

```
x = (
    3)

x = x +
    2
```

See [M-2] **Semicolons** for more information.

## Types and declarations

The *type* of a variable or function is described by

```
eltype orgtype
```

where *eltype* and *orgtype* are each one of

<i>eltype</i>	<i>orgtype</i>
transmorphic	matrix
numeric	vector
real	rowvector
complex	colvector
string	scalar
pointer	

For example, a variable might be real scalar, or complex matrix, or string vector.

Mata also has structures—the *eltype* is *struct name*—but these are not discussed here. For a discussion of structures, see [M-2] **struct**.


Mata also has classes—the *eltype* is *class name*—but these are not discussed here. For a discussion of classes, see [M-2] **class**.

Declarations are optional. When the *type* of a variable or function is not declared, it is assumed to be a transmorphic matrix. In particular:

1. *eltype* specifies the type of the elements. When *eltype* is not specified, transmorphic is assumed.
2. *orgtype* specifies the organization of the elements. When *orgtype* is not specified, matrix is assumed.

All *types* are special cases of transmorphic matrix.

The nesting of *eltypes* is

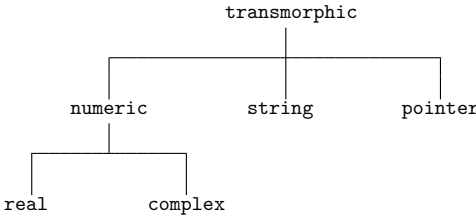

*orgtypes* amount to nothing more than a constraint on the number of rows and columns of a matrix:

<i>orgtype</i>	Constraint
matrix	$r \geq 0$ and $c \geq 0$
vector	$r = 1$ and $c \geq 0$ or $r \geq 0$ and $c = 1$
rowvector	$r = 1$ and $c \geq 0$
colvector	$r \geq 0$ and $c = 1$
scalar	$r = 1$ and $c = 1$

See [M-2] **Declarations**.

## Void matrices

A matrix (vector, row vector, or column vector) that is  $0 \times 0$ ,  $r \times 0$ , or  $0 \times c$  is said to be void; see [M-2] **void**.

The function  $J(r, c, val)$  returns an  $r \times c$  matrix with each element containing *val*; see [M-5] **J()**.

$J()$  can be used to create void matrices.

See [M-2] **void**.

## Void functions

Rather than *eltype orgtype*, a function can be declared to return nothing by being declared to return void:

```
void function example(matrix A)
{
    real scalar i

    for (i=1; i<=rows(A); i++) A[i,i] = 1
}
```

A function that returns nothing (does not include a `return(exp)` statement), in fact returns `J(0, 0, .)`, and the above function could equally well be coded as

```
void function example(matrix A)
{
    real scalar i

    for (i=1; i<=rows(A); i++) A[i,i] = 1
    return(J(0, 0, .))
}
```

or

```
void function example(matrix A)
{
    real scalar i

    for (i=1; i<=rows(A); i++) A[i,i] = 1
    return(J(0,0,.))
}
```

Therefore, void also is a special case of *transmorphic matrix* (it is in fact a  $0 \times 0$  real matrix). Because declarations are optional (but recommended both for reasons of style and for reasons of efficiency), the above function could also be coded as

```
function example(A)
{
    for (i=1; i<=rows(A); i++) A[i,i] = 1
}
```

See [M-2] [Declarations](#).

## Operators

Mata provides the usual assortment of operators; see [M-2] [exp](#).

The monadic prefix operators are

```
-    !    ++    --    &    *
```

Prefix operators `&` and `*` have to do with pointers; see [M-2] [pointers](#).

The monadic postfix operators are

`' ++ --`

Note the inclusion of postfix operator `'` for transposition. Also, for  $Z$  complex,  $Z'$  returns the conjugate transpose. If you want the transposition without conjugation, see [\[M-5\] transposeonly\(\)](#).

The dyadic operators are

`= ? \ :: , . . | & == >= <= < >`  
`!= + - * # ^`

Also, `&&` and `||` are included as synonyms for `&` and `|`.

The operators `==` and `!=` do not require conformability, nor do they require that the matrices be of the same type. In such cases, the matrices are unequal (`==` is false and `!=` is true). For complex arguments, `<`, `<=`, `>`, and `>=` refer to length of the complex vector. `==` and `!=`, however, refer not to length but to actual components. See [\[M-2\] op\\_logical](#).

The operators `,` and `\` are the row-join and column-join operators. `(1,2,3)` constructs the row vector  $(1,2,3)$ . `(1\2\3)` constructs the column vector  $(1,2,3)'$ . `(1,2\3,4)` constructs the matrix with first row  $(1,2)$  and second row  $(3,4)$ . `a,b` joins two scalars, vectors, or matrices rowwise. `a\b` joins two scalars, vectors, or matrices columnwise. See [\[M-2\] op\\_join](#).

`..` and `::` refer to the row-to and column-to operators. `1..5` is  $(1,2,3,4,5)$ . `1::5` is  $(1\2\3\4\5)$ . `5..1` is  $(5,4,3,2,1)$ . `5::1` is  $(5\4\3\2\1)$ . See [\[M-2\] op\\_range](#).

For `|`, `&`, `==`, `>=`, `<=`, `<`, `>`, `!=`, `+`, `-`, `*`, `/`, and `^`, there is `:op` at precedence just below `op`. These operators perform the elementwise operation. For instance,  $A*B$  refers to matrix multiplication;  $A:*B$  refers to elementwise multiplication. Moreover, elementwise is generalized to cases where  $A$  and  $B$  do not have the same number of rows and the same number of columns. For instance, if  $A$  is a  $1 \times c$  row vector and  $B$  is a  $r \times c$  matrix, then  $||C_{ij}|| = ||A_j|| * ||B_{ij}||$  is returned. See [\[M-2\] op\\_colon](#).

## Subscripts

$A[i, j]$  returns the  $i, j$  element of  $A$ .

$A[k]$  returns  $A[1, k]$  if  $A$  is  $1 \times c$  and  $A[k, 1]$  if  $A$  is  $r \times 1$ . That is, in addition to declared vectors, any  $1 \times c$  matrix or  $r \times 1$  matrix may be subscripted by one index. Similarly, any vector can be subscripted by two indices.

$i, j$ , and  $k$  may be vectors as well as scalars. For instance,  $A[(3\4\5), 4]$  returns a  $3 \times 1$  column vector containing rows 3 to 5 of the 4th column.

$i, j$ , and  $k$  may be missing value.  $A[., 4]$  returns a column vector of the 4th column of  $A$ .

The above subscripts are called list-style subscripts. Mata provides a second format called range-style subscripts that is especially useful for selecting submatrices.  $A[|3, 3\5, 5|]$  returns the  $3 \times 3$  submatrix of  $A$  starting at  $A[3, 3]$ .

See [\[M-2\] Subscripts](#).

## Implied input tokens

Before interpreting and compiling a line, Mata makes the following substitutions to what it sees:

Input sequence	Interpretation
<i>'name</i>	<i>'*name</i>
[ ,	[ . ,
, ]	, . ]

Hence, coding  $X'Z$  is equivalent to coding  $X'*Z$ , and coding  $x = z[1,]$  is equivalent to coding  $x = z[1, .]$ .

## Function argument-passing convention

Arguments are passed to functions by address, also known as by name or by reference. They are not passed by value. When you code

```
... f(A) ...
```

it is the address of  $A$  that is passed to  $f()$ , not a copy of the values in  $A$ .  $f()$  can modify  $A$ .

Most functions do not modify their arguments, but some do. `lud(A, L, U, p)`, for instance, calculates the LU decomposition of  $A$ . The function replaces the contents of  $L$ ,  $U$ , and  $p$  with matrices such that  $L[p,]*U = A$ .

Oldtimers will have heard of the FORTRAN programmer who called a subroutine and passed to it a second argument of 1. Unbeknownst to him, the subroutine changed its second argument, with the result that the constant 1 was changed throughout the rest of his code. That cannot happen in Mata. When an expression is passed as an argument (and constants are expressions), a temporary variable containing the evaluation is passed to the function. Modifications to the temporary variable are irrelevant because the temporary variable is discarded once the function returns. Thus if  $f()$  modifies its second argument and you call it by coding  $f(A, 2)$ , because 2 is copied to a temporary variable, the value of the literal 2 will remain unchanged on the next call.

If you call a function with an expression that includes the assignment operator, it is the left-hand side of the expression that is passed. That is, coding

```
f(a, b=c)
```

has the same result as coding

```
b = c
f(a, b)
```

If function  $f()$  changes its second argument, it will be  $b$  and not  $c$  that is modified.

Also, Mata attempts not to create unnecessary copies of matrices. For instance, consider

```
function changearg(x) x[1,1] = 1
```

`changearg(mymat)` changes the 1,1 element of `mymat` to 1. Now let us define

```
function cp(x) return(x)
```

Coding `changearg(cp(mymat))` would still change `mymat` because `cp()` returned `x` itself. On the other hand, if we defined `cp()` as

```
function cp(x)
{
    matrix t

    t = x
    return(t)
}
```

then coding `changearg(cp(mymat))` would not change `mymat`. It would change a temporary matrix which would be discarded once `changearg()` returned.

## Passing functions to functions

One function may receive another function as an argument using pointers. One codes

```
function myfunc(pointer(function) f, a, b)
{
    ... (*f)(a) ... (*f)(b) ...
}
```

although the `pointer(function)` declaration, like all declarations, is optional. To call `myfunc()` and tell it to use function `prima()` for `f()`, and 2 and 3 for `a` and `b`, one codes

```
myfunc(&prima(), 2, 3)
```

See [\[M-2\] ftof](#) and [\[M-2\] pointers](#).

## Optional arguments

Functions may be coded to allow receiving a variable number of arguments. This is done by placing a vertical or bar (`|`) in front of the first argument that is optional. For instance,

```
function mynorm(matrix A, |scalar power)
{
    ...
}
```

The above function may be called with one matrix or with a matrix followed by a scalar.

The function `args()` (see [\[M-5\] args\(\)](#)) can be used to determine the number of arguments received and to set defaults:

```
function mynorm(matrix A, |scalar power)
{
    ...
    (args()==1) power = 2
    ...
}
```

See [\[M-2\] optargs](#).



## Reference

Gould, W. W. 2005. [Mata Matters: Translating Fortran](#). *Stata Journal* 5: 421–441.

## Also see

[\[M-2\] Intro](#) — Language definition

Stata, Stata Press, Mata, NetCourse, and NetCourseNow are registered trademarks of StataCorp LLC. Stata and Stata Press are registered trademarks with the World Intellectual Property Organization of the United Nations. StataNow is a trademark of StataCorp LLC. Other brand and product names are registered trademarks or trademarks of their respective companies. Copyright © 1985–2025 StataCorp LLC, College Station, TX, USA. All rights reserved.



For suggested citations, see the FAQ on [citing Stata documentation](#).